


## Dock Project 1 (Priority #1)

- Remove cables from posts on creek
- Put down decking on creek docks and secure over frames

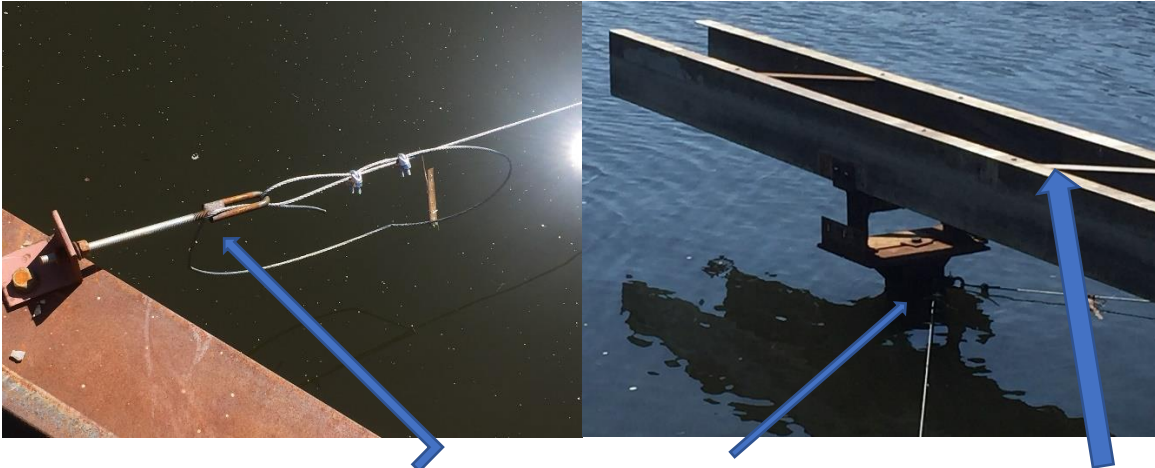

Roll up and attach the cables by bag here.

Remove the cables from here. Place decking on top.

### Rationale

- Large number of boats (9) can't moor with cables in place
- Decking needs to be in place for member safety
- Water is rising in creek and will increase difficulty of removing cables

### Equipment Needed

- Floats (in Basin)
- Ratchets, wrenches, rags
- Large freezer bags, zip-ties and WD-40

### Suggested Crew: 4-6

### Comments

The cables need to be removed to allow for boat mooring. To simplify the task, undo the cables from the steel posts in the creek, roll them up while wiping them down with WD-40, place a plastic bag over the rolled-up cable and zip-tie it tightly over the connecting bolt. This has the advantage of lessening work, providing a barrier to the bolt and ensuring we're not searching for these cables next season. Once done, place wood decking over frames (located outside of clubhouse) and bolt down with screws/bolts (from club house and Brower building)

**Estimated time for completion with six-man crew: 2-3 hours**